

GRUETTA GT350


GRUETTA GT500

GRUETTA GM500




Lifting accessories Dodaci za dizanje

Bucket holder	•
Nosač kofe (40l)	•
Two buckets holder	•
Nosač za dve kofe	•
Three buckets holder	•
Nosač za tri kofe	•
Four buckets holder	•
Nosač za četiri kofe	•
Tilting trapezoidal bucket	•
Korpa samokipujuća (60l)	•
Tilting trapezoidal bucket	•
Korpa samokipujuća (100l)	•
Tilting trapezoidal bucket	•
Korpa samo kipujuća (150l)	•
Special carrier with 3 hooks	•
Nosač sa tri kuke	•
24V Remote control single/three-phase	•
Upravljačka kutija 24V mono/tro-fazna	•

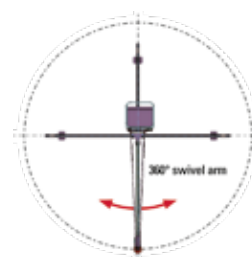


Technical Data Tehnički podaci

		GT350	GT500	GM500
Safe working load Nosivost	KG	350	500	500
Lifting speed Brzina dizanja	m/min	35	22	17
Lifting group Grupa dizanja		A4	A4	A4
Weight of the hoist Težina dizalice	KG	165	170	171
Electric motor Elektro motor		threephase trofazni	threephase trofazni	singlephase monofazni
Power Potenza Snaga motora	kW	2,2	2,2	2,2
Voltage Napon	V	230/400	230/400	230
Frequency Frekvencija	Hz	50	50	50
Intensity of current Jacina el. struje	A	7,4	7,4	9,5
Rotor shaft angular speed Broj obrtaja vratila	o/min	1400	1400	1400
Reduction ratio Redukcioni odnos		1:18,2	1:31	1:40,6
Non-rotating wire rope diameter Prečnik sajle	mm	6	6	6
Maximum breaking load Maks. prekidna sila	kN	25	25	25
Rope grade Sila pucanja sajle	N/mm ²	1960	1960	1960
Length of the rope Dužina sajle	m	40	40	40
Max length of the rope Maks. dužina sajle	m	50	50	50

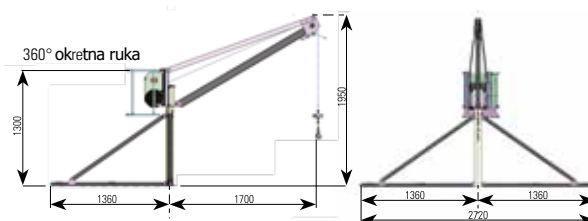

Hoist dimensions Dimenzije

			GT350	GT500	GM500
Length Dužina	A	mm	1900	1900	1900
Width Sirina	B	mm	142	142	142
Height Visina	C	mm	350	350	350



Hoist dimensions Dimenzije

			GT350	GT500	GM500
Length Dužina	A	mm	640	640	640
Width Sirina	B	mm	430	430	430
Height Visina	C	mm	540	540	540

